

Facestock

A clear corona treated, bi-axially oriented polypropylene film.

Basis Weight	18 g/m ²	ISO 536
Caliper	20 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

BG40 white, a supercalendered glassine paper.

The liner is made from FSC® certified paper (FSC Mix Credit, chain-of-custody number: CU-COC-807907, Licence Code: FSC-C004451).

Basis Weight	58 g/m ²	ISO 536
Caliper	51 µm	ISO 534

Laminate

Total Caliper	87 µm±10%	ISO 534
---------------	-----------	---------

Performance Data

Initial Tack	10 N/25mm	FTM 9 Glass
Peel Adhesion 90°	6 N/25mm	FTM 2 St.St.
Min. Application Temp.	5 °C	
Service Temperature	-20 °C to 80 °C	

Adhesive Performance

S692N is a clear permanent adhesive featuring excellent UV resistance and weatherability together with good adhesion performance, even on apolar substrates.

Conversion and Printing

The material can be printed by conventional printing techniques including flexo, screen, offset, letterpress, silkscreen, gravure, and hot foiling processes. UV, water-based and solvent-based inks can be used. Inline corona treatment is recommended for optimum ink adhesion. Overlaminating of the printed face material gives excellent scratch resistance and allows high speed dispensing.

Compliance and Approvals

The adhesive S692N is suitable for contact with dry, moist and fatty foodstuffs with a reduction factor of 3 or higher in this construction. For complete information regarding the food contact compliance status, please contact your local sales representative for a Food Contact Statement.


Shelf Life

To obtain optimal performance, use this product within two years of the date of manufacture, under storage conditions as defined by FINAT (20-25°C; 40-50%RH). Prolonged storage outside these conditions might reduce the shelf life.

AN530

Fasson ®

PP20 CLEAR
S692N-BG40WH FSC

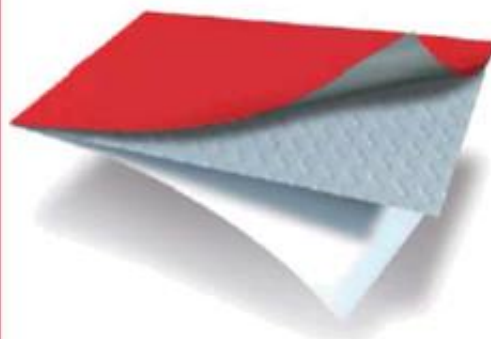

PP20 CLEAR

S692N

BG40WH FSC



This is an automatically generated datasheet. All data to be considered as typical values and subject to change without prior notice. Further testing is always recommended.

If you would like to make a suggestion or comment on this datasheet, please send an email to datasheet.mgmt@eu.averydennison.com